

YANMAR C60-R

SPECIFICATION



Visit altida.co.uk Call 01246 261915 Email sales@altida.co.uk


ALTIDATM
CRANE HIRE

YANMAR C60-R SPECIFICATION

Item	Specification	Unit	Canopy		Cabin	
			Standard	Crane	Standard	Crane
Length x Width x Height		mm	4745 x 2400 x 2580	5290 x 2400 x 2680	4745 x 2400 x 2580	5290 x 2400 x 2680
Dump body dimensions (L x W x H)		mm	3025 x 2100 x 350	2280 x 2100 x 350	3025 x 2100 x 350	2280 x 2100 x 350
Machine weight		kg	6370	7120	6475	7225
Engine	Type	---	Vertical, water-cooled, 4 cylinder, diesel engine			
	Model	---	4T112TL-FW			
	Output/speed	PS/rpm	130/2500			
Dump body capacity	Flushed	m ²	2.20	1.80	2.20	1.80
	Heaped	m ²	3.70	3.00	3.70	3.00
Maximum allowable load		kg	4500	4000	4500	4000
Maximum dump body angle		degree	60			
Crane	Capacity	t x m	---	2.02 x 2	---	2.02 x 2
	Max. dump lift above ground	m	---	5.66	---	5.66
Travel speed	Forward	km/hr	0 ~ 10			
	Backward	km/hr	0 ~ 10			
Ground contact pressure	With load	kgf/cm ²	0.38	0.39	0.38	0.39
	Without load	kgf/cm ²	0.22	0.24	0.22	0.25




YANMAR C60-R SPECIFICATION

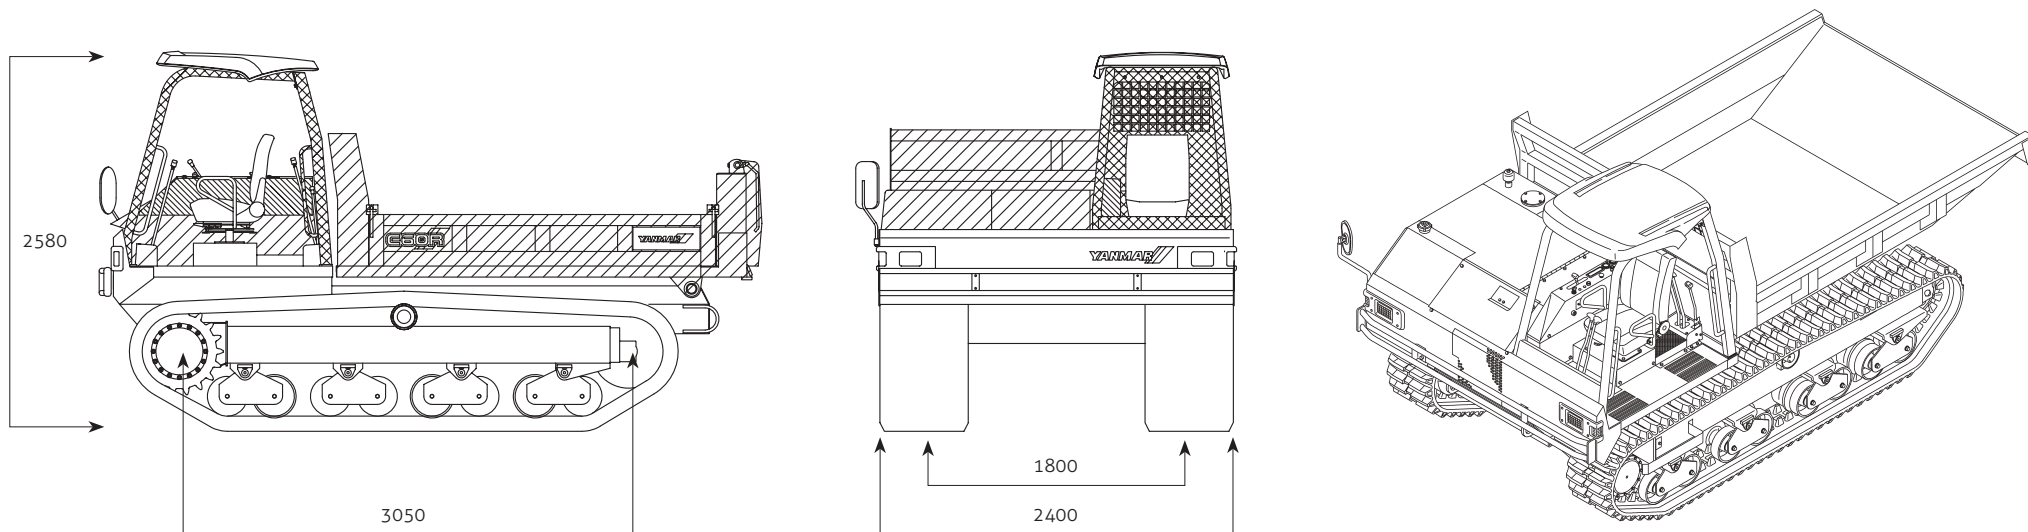


A230 UNIC

Maximum Lifting Capacity 2,330 kg. at 1.7 m

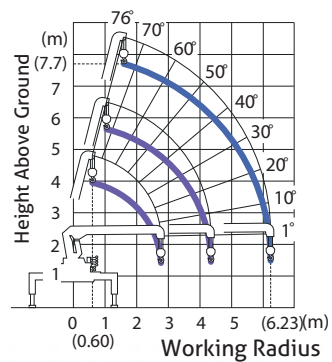

3 Sections Boom

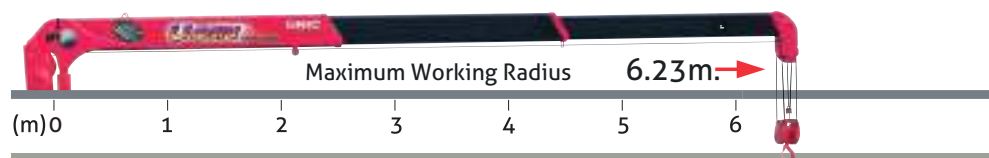

RATED LOAD

Working Radius	0.60~1.7	2.0	2.2	2.5	3.0	3.5	4.0	5.0	6.23
	2.33	2.03	1.83	1.53	1.28	1.08	0.98	0.88(4.35m)	
					1.23	1.03	0.88	0.6	0.53